



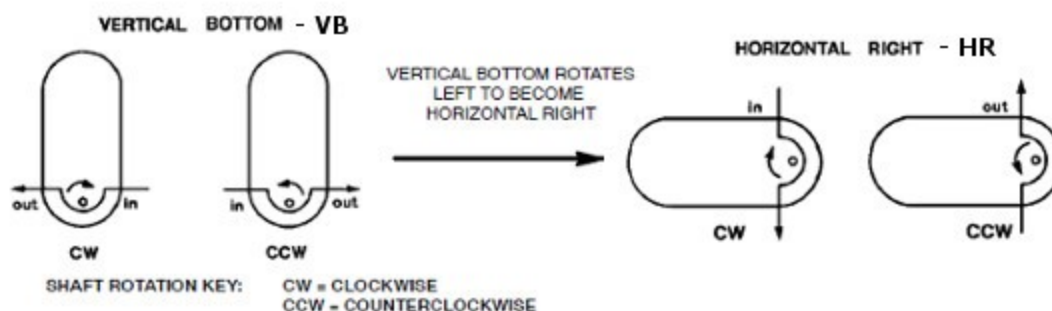

## Duroflow Configuration Guide

The Duroflow 45 Series features Flex-Mount™ design with removable inlet and discharge connectors to provide installation versatility.

Use the illustration below to select the required shaft configuration. Your blower will be shipped to you as specified in your order. Connectors are sold separately.

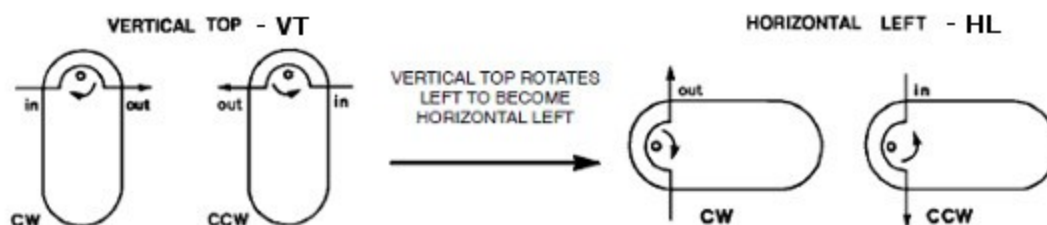

TWO CONNECTIONS REQUIRED FOR EACH BLOWER  
NOTE: CONNECTORS ARE REUSABLE

DuroFlow Model	CONNECTOR PART NUMBER					
	4" Line Size Connector (Short)	4" Line Size Connector (Long)	5" Line Size Connector (Short)	5" Line Size Connector (Long)	6" Line Size Connector (Short)	6" Line Size Connector (Long)
4504	N/A	DF141575	N/A	N/A	N/A	N/A
4506	DF137356	DF137357	N/A	N/A	N/A	N/A
* 4509	DF138987	N/A	DF149559	DF137346	N/A	N/A
4512	N/A	N/A	N/A	N/A	DF141748	DF137344

ALL CONNECTORS HAVE FEMALE THREADED CONNECTIONS.

Excelsior Blower Systems, Inc., 331 June Ave, Blandon, PA 19510  
610-921-9558 [www.excelsiorblower.com](http://www.excelsiorblower.com)